



C-20 AAA

20:1 Air Assisted Airless Unit

C-20 AAA

Features

- Durable and Dependable Pump for Continuous Operation
- → 100 psi maximum inlet pressure. 2000 psi maximum fluid pressure.
- → 2 GPM displacement for automatic multiple gun applications (8 guns up to 13 thousandths tip)
- Separate fluid section fluid filter with multiple outlets optional
- → Available with cart mount or wall mount, 5 or 55 gallon siphon assemblies
- → Throat seal is completely inclosed to reduce contamination with a sight gauge for ease of checking lubricant levels
- New "CAT Fast Clamp" makes for easy and rapid removal for maintenance of the fluid section from the air motor
- → Pumps come standard with an all stainless steel fluid section and can be used for most solvent and waterborne coatings, paints, pigmented lacquers, pre and post catalyzed materials and primers
- C-20pumps are available for single or multiple gun outfits for use with the Bobcat, Cougar, or Bobcat Automatic Guns.




C.A. Technologies is proud to introduce the newest addition to the CAT pump line - the C-20 AAA. Designed with a 20 to 1 fluid ratio for higher viscosity materials and multi-gun operation, incorporates a totally enclosed throat seal to reduce contamination. The fluid section and air motor are built for easy "field" repairs with fewer parts lowering maintenance costs and equipment down time. The magnetic no stall trip mechanism insures smooth pump stroke transition with virtually no "surge" or "wink" in spray pattern. The standard fluid section utilizes a spring seal configuration on the lower and self-adjusting "V" packing on the upper. An optional self-adjusting "V" packing for the lower is available for abrasive coatings.





20:1 Fine Finish Series Pump Outfits

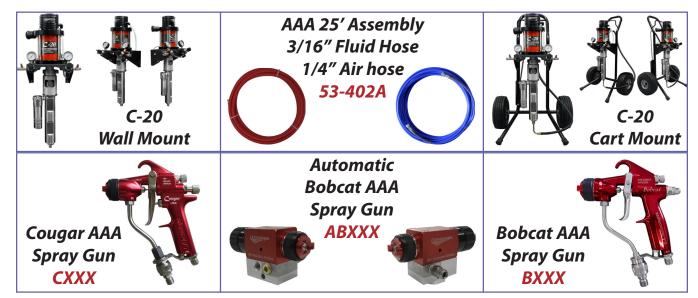

Bobcat Automatic

C.A.Technologies has placed many of these spray guns with different brands and types of automatic machines with great success. With the C-20 pump available, we can supply the equipment package for new machines or update existing machines at a great price.



C-20 PART NUMBER & PRICE CALCULATOR



^{*}The top row of each column will be used as the standard default if an option in that column is not selected. For multiple guns and hose packages, please add requested quantities after the gun letter, and hose numbers.

I.E. C20-MU42-C5-2B411-2A (20:1 pump with manual take-up upper seal, U Cup lower seal, 1/2" inlet, 1/4" outlet, cart mounted 5 gallon siphon, (2) Bobcat guns and (2) 25' hose assemblies)** Price calculators are available at www.spraycat.com

Accessories



AAA Tip Cleaning Needles

91-216

52-410 (STD Fluid Filter Assy) 52-420

(S.S. Fluid Filter Assy)



74-520 - 1/2" 74-530 - 3/4" (5 Gal Siphon Hose) 74-524 - 1/2" 74-531 - 3/4" (55 Gal Siphon Hose)



74-511 - 1/2"
Siphon Hose
Filter
Assembly